

UMORE



BARI
PORCELAIN TILES



12X24 TILE



SMOKE
UMOSMOKBAR1224M




CHARCOAL
UMOCHARBAR1224M




TAUPE
UMOTAUPBAR1224M


12X12 SQUARE MOSAIC

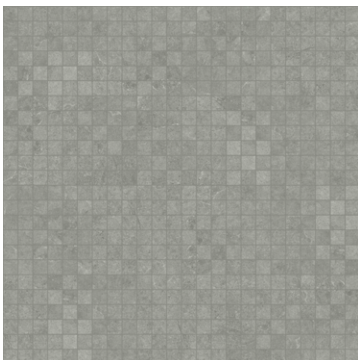

SMOKE
UMOSMOKBAR25QM

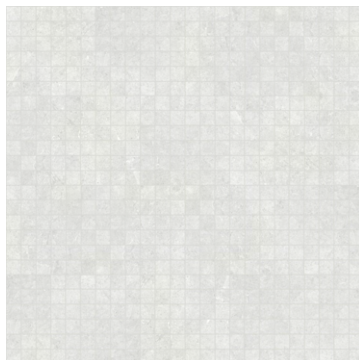



CHARCOAL
UMOCHARBAR25QM

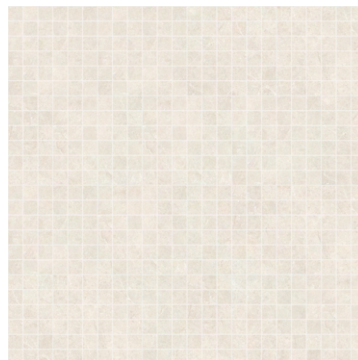

TAUPE
UMOTAUPBAR25QM

SIZES

| | Nominal Size | Actual Size | Thickness | Color | Finish | Sq. Ft. / Carton | Pcs / Carton |
|--|-----------------------|-----------------------------------|-----------|------------------------|--------|------------------|--------------|
|  | 12"x24" | 11.90"x24" | 9mm | Smoke, Charcoal, Taupe | Matte | 15.50 sqft | 8 |
|  | 12"x12" Square Mosaic | 12.12"x12.12" Sheet 2"x2" Chip | 9mm | Smoke, Charcoal, Taupe | Matte | 10.76 sqft | 11 |

PRODUCT INFORMATION

| | |
|-----------------------|-----------|
| Material | Porcelain |
| Body Color | Standard |
| Edge | Rectified |
| Manufacturing Process | Inkjet |
| Country of Origin | Malaysia |

INSTALLATION

Suggested Grout Line Size 1/16", 1/8", or 3/16"

| | |
|----------------------|---------------------|
| Installation Options | Floor/Wall |
| Shade Variation | V2 Slight Variation |



PERFORMANCE PROPERTIES

| Test | Test Standard | Result |
|---------------------------------|--|-----------|
| Dynamic Coefficient of Friction | ANSI A137.1-2012 AcuTest™ ANSI/NFSI B101.3-2012 | >0.42 |
| Water Absorption | ASTM C373-16 ISO 10545-3 | <0.15% |
| PEI Rating | ASTM C1027-09 or ISO 10545-7 (Glazed); ASTM C1243-93 (2015) or ISO 10545-6 (Unglazed) | 3 |
| Mohs Scratch Hardness | 1:Talc 2:Gypsum 3:Calcite 4:Fluorite 5:Apatite 6:Feldspar 7:Quartz 8:Topaz 9:Corundum 10:Diamond | 6 |
| Breaking Strength | ASTM C648-04 (2014): ≥275 lbf | ≥275 lbf |
| Chemical Resistance | ASTM C650 | Class 3 |
| Freeze Thaw | ASTM C1026 | Resistant |

APPLICATION

| | | | |
|-----------------|---|-----------------------------|---|
| Backsplash | ✓ | Indoor Wall | ✓ |
| Shower Wall | ✓ | Indoor Floor | ✓ |
| Shower Floor | ✓ | Pool Decking | ✗ |
| Submerged (Tub) | ✓ | Submerged (Pool) | ✗ |
| Outdoor | ✓ | Residential/Commercial Use: | ✓ |

NOTES

Product specifications are subject to variation and tolerances within testing or productions and may vary. Variations in appearance, texture, construction, dimensions, performance, and style may occur and should be considered in product selection.

The product specifications listed reflect data from the manufacturer or from laboratory testing performed under specific testing conditions. As such it does not represent all conditions under which the products may be used or subjected.

For information on performance standards and/or suitability please consult the ANSI, ASTM, or Tile Council of North America resources.

