

# UMORE



## CLASSICO

(5 OF 5) PORCELAIN MOSAICS

# CLASSICO

(5 OF 5) PORCELAIN MOSAICS

UMORE



HEX MOSAIC



WHITE DOVE  
UMOWHD05CLHEXM

HERRINGBONE MOSAIC



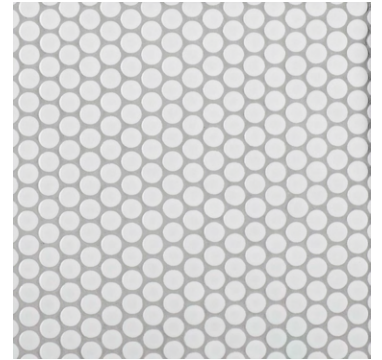
WHITE  
UMOWHIT5CLHBG

PICKET MOSAIC



WHITE  
UMOWHIT5CLPICM

PENNY MOSAIC







WHITE  
UMOWHIT5CLPRG

# CLASSICO

## (5 OF 5) PORCELAIN MOSAICS

UMORE

### SIZES

	Nominal Size	Actual Size	Thickness	Color	Finish	Sq. Ft. / Carton	Pcs / Carton
	11"x13" Hex Mosaic	11"x12.80" Sheet 2" Chip	0.24"	White Dove	Matte	9.70 sqft	10
	11"x13" Herringbone Mosaic	10.80"x12.40" Sheet 1"x3" Chip	0.24"	White	Gloss	9.30 sqft	10
	11"x13" Picket Mosaic	11"x13" Sheet 4" Chip	0.24"	White	Matte	10.10 sqft	10
	11"x11" Penny Mosaic	10.70"x10.70" Sheet 1" Chip	0.24"	White	Gloss	8.91 sqft	11

### PRODUCT INFORMATION

Material	Porcelain
Body Color	Standard
Edge	Pressed
Manufacturing Process	Glazed
Country of Origin	Hex/Penny: Thailand Herringbone: Vietnam Picket: Malaysia

### PERFORMANCE PROPERTIES

Test	Test Standard	Result
Dynamic Coefficient of Friction	ANSI A137.1-2012 AcuTest™ ANSI/NFSI B101.3-2012	Hex: n/a Herringbone: <0.42 Picket: 0.23 Penny: 0.54
Water Absorption	ASTM C373-16 ISO 10545-3	Water Resistant (with proper sealant)
PEI Rating	ASTM C1027-09 or ISO 10545-7 (Glazed); ASTM C1243-93 (2015) or ISO 10545-6 (Unglazed)	Hex: 4 Herringbone: 3 Picket/Penny: n/a
Mohs Scratch Hardness	1:Talc 2:Gypsum 3:Calcite 4:Fluorite 5:Apatite 6:Feldspar 7:Quartz 8:Topaz 9:Corundum 10:Diamond	n/a
Breaking Strength	ASTM C648-04 (2014): ≥275 lbf	n/a
Chemical Resistance	ASTM C650	n/a
Freeze Thaw	ASTM C1026	n/a

### INSTALLATION

Suggested Grout Line Size	1/16"
Installation Options	Floor/Wall
Shade Variation	V0 Very Uniform Appearance



### APPLICATION

Backsplash	✓	Indoor Wall	✓
Shower Wall	✓	Indoor Floor	✓
Shower Floor	✓	Pool Decking	✗
Submerged (Tub)	✓	Submerged (Pool)	Herringbone: ✗ Hex/Picket/Penny: ✓
Outdoor	✓	Residential/Commercial Use:	✓

### NOTES

Product specifications are subject to variation and tolerances within testing or productions and may vary. Variations in appearance, texture, construction, dimensions, performance, and style may occur and should be considered in product selection.

The product specifications listed reflect data from the manufacturer or from laboratory testing performed under specific testing conditions. As such it does not represent all conditions under which the products may be used or subjected.

For information on performance standards and/or suitability please consult the ANSI, ASTM, or Tile Council of North America resources.

