


# UMORE



MILAN  
PORCELAIN TILES

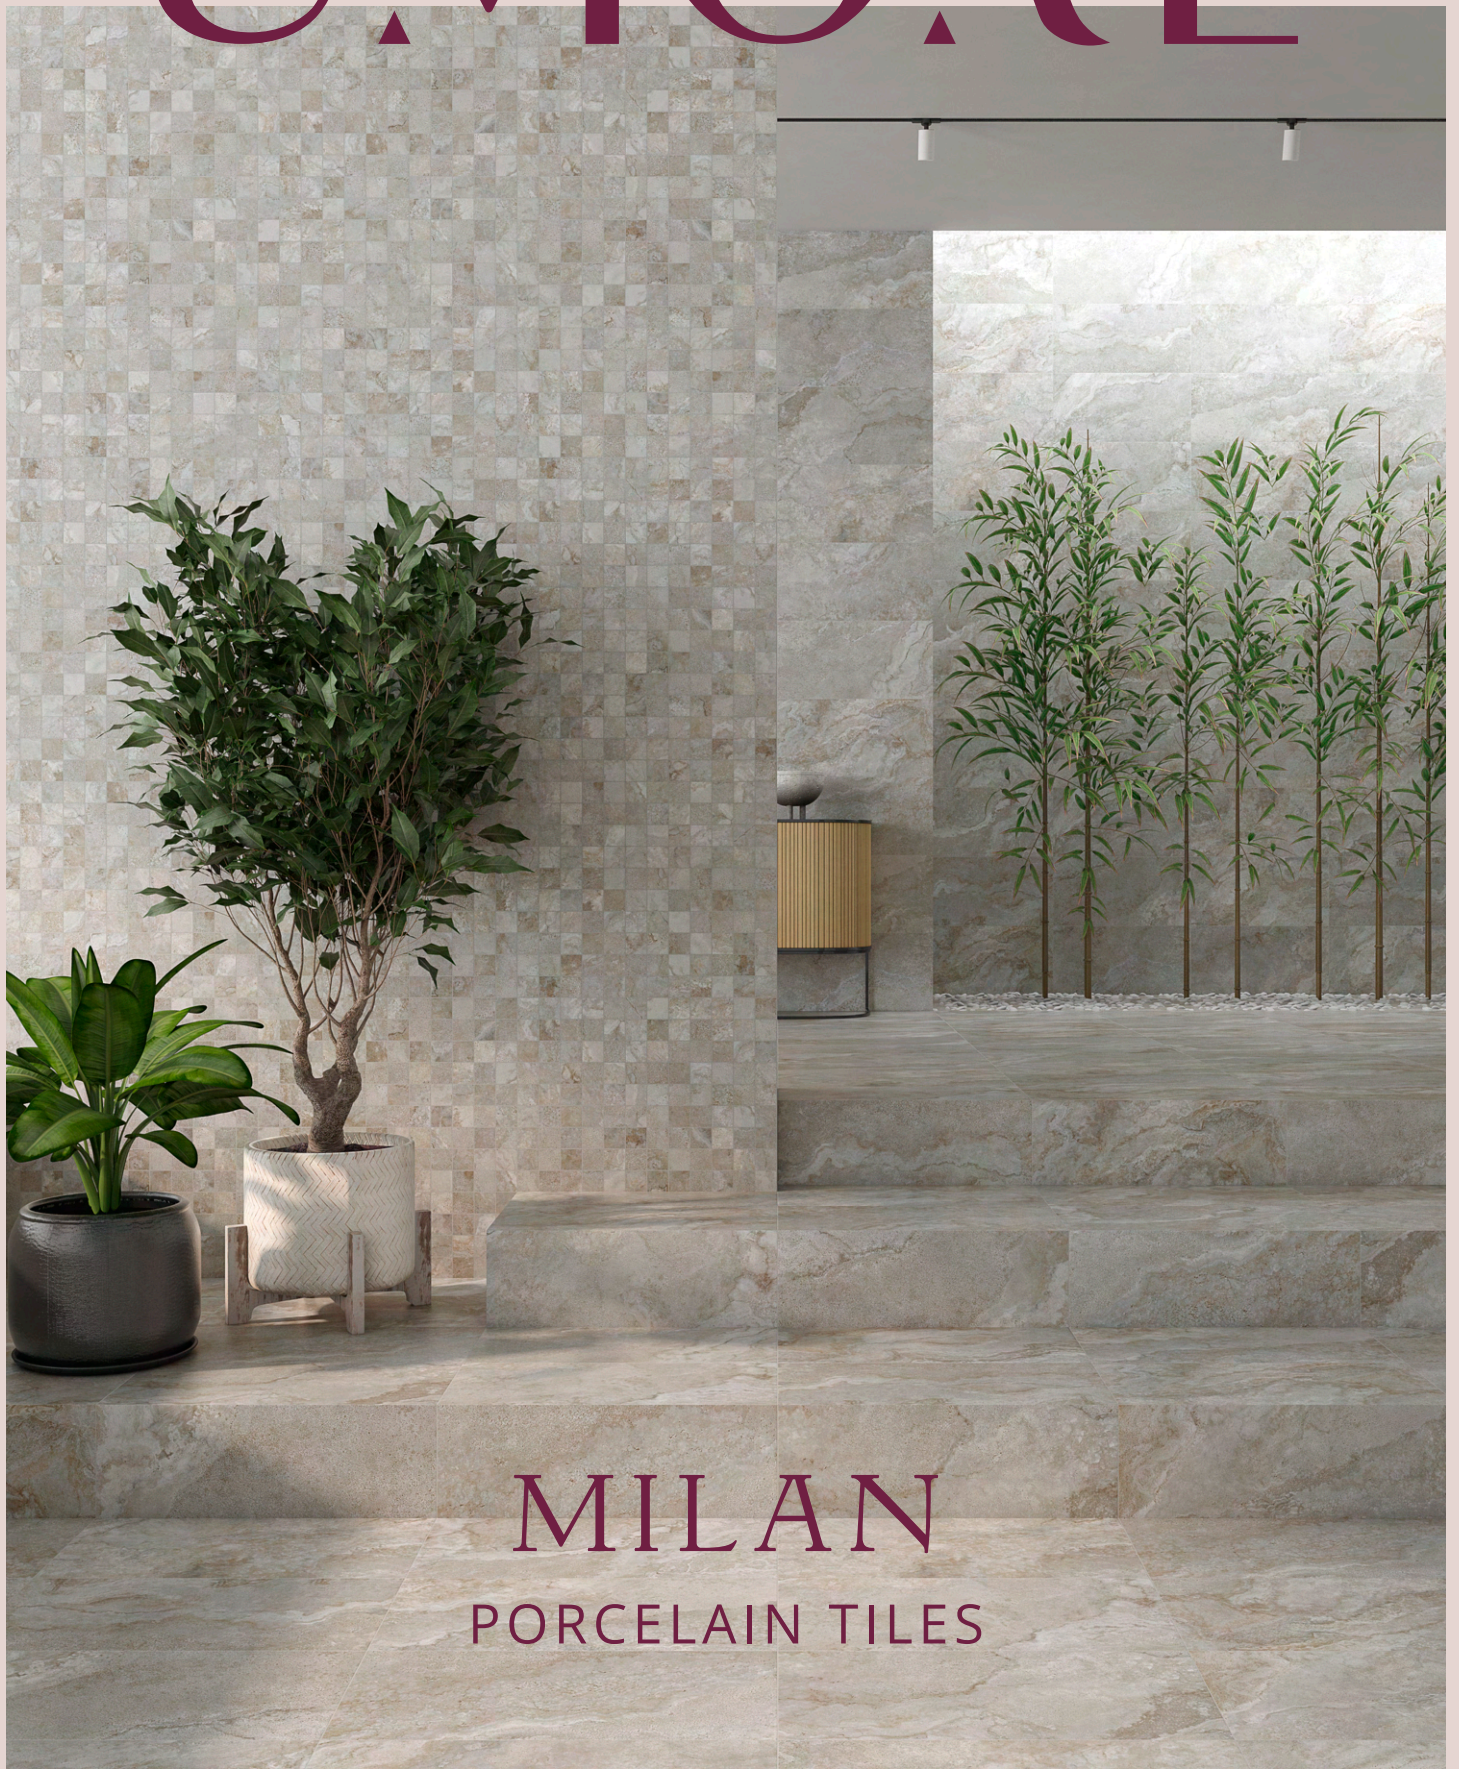

STEAM



STEAM 12X24  
UMOSTEAMIL1224P

STEAM MATTE 12X24  
UMOSTEAMIL1224M

STEAM 12X12 SQUARE MOSAIC  
UMOSTEAMIL25QP

STEAM MATTE 12X12 SQUARE MOSAIC  
UMOSTEAMIL25QM

SNOW





SNOW 12X24  
UMOSNOWMIL1224P

SNOW MATTE 12X24  
UMOSNOWMIL1224M

SNOW 12X12 SQUARE MOSAIC  
UMOSNOWMIL25QP

SNOW MATTE 12X12 SQUARE MOSAIC  
UMOSNOWMIL25QM

### SIZES

	Nominal Size	Actual Size	Thickness	Color	Finish	Sq. Ft. / Carton	Pcs / Carton
	12"x24"	11.80"x23.60"	9.5mm	Steam	Matte or Polished	11.62 sqft	6
		11.70"x23.50"	9mm	Snow	Matte or Polished	13.45 sqft	7
	12"x12" Square Mosaic	11.80"x11.80" Sheet 2"x2" Chip	9.5mm	Steam	Matte or Polished	n/a	10
		11.70"x11.70" Sheet 2"x2" Chip	9mm	Snow	Matte or Polished	n/a	10

### PRODUCT INFORMATION

Material	Porcelain
Body Color	Standard
Edge	Rectified
Manufacturing Process	Inkjet
Country of Origin	Steam: Spain / Snow: USA

### INSTALLATION

Suggested Grout Line Size	1/16", 1/8", or 3/16"
Installation Options	Floor/Wall
Shade Variation	V3 Moderate Variation



### PERFORMANCE PROPERTIES

Test	Test Standard	Result
Dynamic Coefficient of Friction	ANSI A137.1-2012 AcuTest™ ANSI/NFSI B101.3-2012	Polished: <0.42 Matte: ≥0.42
Water Absorption	ASTM C373-16 ISO 10545-3	≤0.5% (Impervious)
PEI Rating	ASTM C1027-09 or ISO 10545-7 (Glazed); ASTM C1243-93 (2015) or ISO 10545-6 (Unglazed)	Steam: 4 Snow: 3
Mohs Scratch Hardness	1:Talc 2:Gypsum 3:Calcite 4:Fluorite 5:Apatite 6:Feldspar 7:Quartz 8:Topaz 9:Corundum 10:Diamond	Snow Polished: 5 Snow Matte: 7 Steam: 4
Breaking Strength	ASTM C648-04 (2014): ≥275 lbf	>275
Chemical Resistance	ASTM C650	Steam: Class A- 0 Snow Polished: Class E- 4+ Snow Matte: Class A- 0
Freeze Thaw	ASTM C1026	Resistant

### APPLICATION

Backsplash	✓	Indoor Wall	✓
Shower Wall	✓	Indoor Floor	✓
Shower Floor	Polished: ✗ Matte: ✓	Pool Decking	Polished: ✗ Matte: ✓
Submerged (Tub)	Polished: ✗ Matte: ✓	Submerged (Pool)	Snow Polished: ✗ Snow Matte: ✓ Steam: ✗
Outdoor	Polished: ✗ Matte: ✓	Residential/Commercial Use:	✓

### NOTES

Product specifications are subject to variation and tolerances within testing or productions and may vary. Variations in appearance, texture, construction, dimensions, performance, and style may occur and should be considered in product selection.

The product specifications listed reflect data from the manufacturer or from laboratory testing performed under specific testing conditions. As such it does not represent all conditions under which the products may be used or subjected.

For information on performance standards and/or suitability please consult the ANSI, ASTM, or Tile Council of North America resources.

