


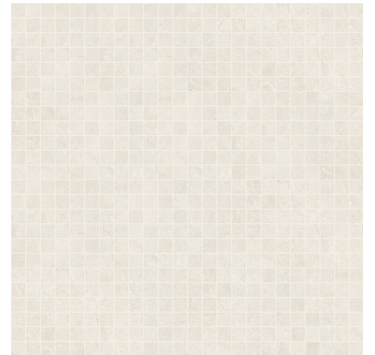
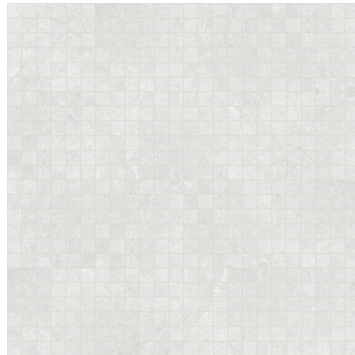


UMORE

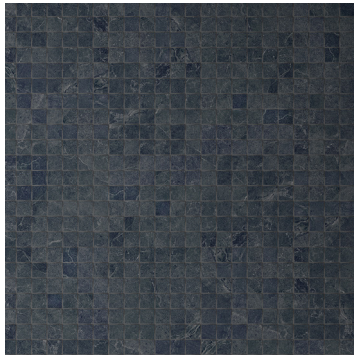

BARI
PORCELAIN TILE

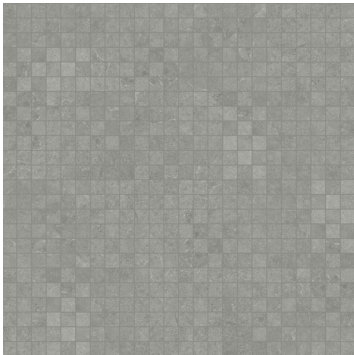

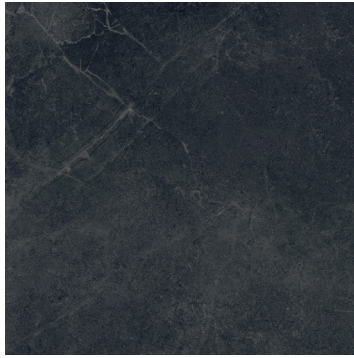



CHARCOAL

GRAPHITE

SMOKE

TAUPE


SIZES

	Nominal Size	Actual Size	Thickness	Color	Finish	Faces	Sq. Ft. / Carton	Pcs / Carton
	12"x24"	11.90"x24"	9mm	Smoke, Charcoal, Taupe, Graphite	Matte	24	15.50 sqft	8
	24"x48"	23.62"x47.24"	9mm	Smoke, Charcoal, Taupe, Graphite	Matte	6	15.50 sqft	2
	24"x24"	23.62"x23.62"	9mm	Smoke, Charcoal, Taupe, Graphite	Matte	12	15.50 sqft	4
	12"x12" Square Mosaic	12.12"x12.12" Sheet 2"x2" Chip	9mm	Smoke, Charcoal, Taupe, Graphite	Matte	n/a	10.76 sqft	11

PRODUCT INFORMATION

Material	Porcelain
Body Color	Standard
Edge	Rectified
Manufacturing Process	Inkjet
Country of Origin	Malaysia

INSTALLATION

Suggested Grout Line Size	1/16", 1/8", or 3/16"	
Installation Options	Floor/Wall	
Shade Variation	V2 Slight Variation	

PERFORMANCE PROPERTIES

Test	Test Standard	Result
Dynamic Coefficient of Friction	ANSI A137.1-2012 AcuTest™ ANSI/NFSI B101.3-2012	>0.42
Water Absorption	ASTM C373-16 ISO 10545-3	<0.50%
PEI Rating	ASTM C1027-09 or ISO 10545-7 (Glazed); ASTM C1243-93 (2015) or ISO 10545-6 (Unglazed)	3
Mohs Scratch Hardness	1:Talc 2:Gypsum 3:Calcite 4:Fluorite 5:Apatite 6:Feldspar 7:Quartz 8:Topaz 9:Corundum 10:Diamond	12"x24" & Mosaic: 6 24"x48" & 24"x24": 5
Breaking Strength	ASTM C648-04 (2014): ≥275 lbf	≥275 lbf
Chemical Resistance	ASTM C650	GA
Freeze Thaw	ASTM C1026	Resistant

APPLICATION

Backsplash	✓	Indoor Wall	✓
Shower Wall	✓	Indoor Floor	✓
Shower Floor	✓	Pool Decking	✓
Submerged (Tub)	✓	Submerged (Pool)	24"x48" & 24"x24"
Outdoor	✓	Residential/Commercial Use:	✓

NOTES

Product specifications are subject to variation and tolerances within testing or productions and may vary. Variations in appearance, texture, construction, dimensions, performance, and style may occur and should be considered in product selection.

The product specifications listed reflect data from the manufacturer or from laboratory testing performed under specific testing conditions. As such it does not represent all conditions under which the products may be used or subjected.

For information on performance standards and/or suitability please consult the ANSI, ASTM, or Tile Council of North America resources.

