

# UMORE



RAVENNA  
STONE MOSAICS



BIANCO ORION



BASKETWEAVE



HERRINGBONE




HEX



PICKET

CALACATTA

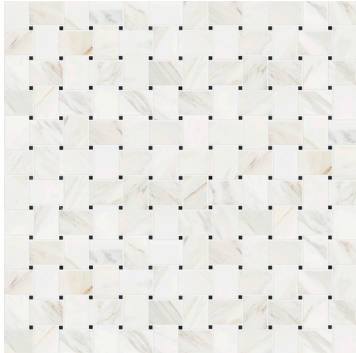

BASKETWEAVE



HERRINGBONE



HEX



PICKET





ICEBERG



BASKETWEAVE



HERRINGBONE




HEX



PICKET

THASSOS

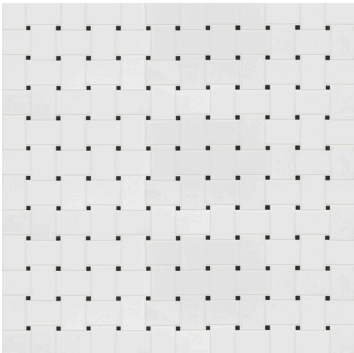


BASKETWEAVE



HERRINGBONE



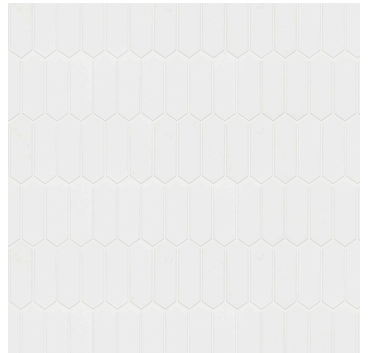

HEX



PICKET

### SIZES

	Nominal Size	Actual Size	Thickness	Color	Finish	Faces	Sq. Ft. / Carton	Pcs / Carton
	12"x11" Hex Mosaic	12"x10.35" 4" Chip	9.5mm	Bianco Orion	Satin	n/a	4.30 sqft	5
	12"x12" Herringbone Mosaic	11.30"x12" 1"x4" Chip	9.5mm	Bianco Orion	Satin	n/a	4.70 sqft	5
	12"x10" Picket Mosaic	11.73"x10" 2"x6" Chip	9.5mm	Bianco Orion	Satin	n/a	4.075 sqft	5
	12"x12" Basketweave Mosaic	11.73"x11.73" 3.38"x2.44" Chip	9.5mm	Bianco Orion	Satin	n/a	4.80 sqft	5

### PRODUCT INFORMATION

Material	Marble
Body Color	n/a
Edge	Waterjet Cut
Manufacturing Process	Honed
Country of Origin	Vietnam

### INSTALLATION

Suggested Grout Line Size 1/16", 1/8", 3/16"

Installation Options	Floor/Wall
Shade Variation	V3* Moderate Variation



### PERFORMANCE PROPERTIES

Test	Test Standard	Result
Dynamic Coefficient of Friction	ANSI A137.1-2012 AcuTest™ ANSI/NFSI B101.3-2012	<0.42
Water Absorption	ASTM C373-16 ISO 10545-3	<0.50%
PEI Rating	ASTM C1027-09 or ISO 10545-7 (Glazed); ASTM C1243-93 (2015) or ISO 10545-6 (Unglazed)	n/a
Mohs Scratch Hardness	1:Talc 2:Gypsum 3:Calcite 4:Fluorite 5:Apatite 6:Feldspar 7:Quartz 8:Topaz 9:Corundum 10:Diamond	5
Breaking Strength	ASTM C648-04 (2014): ≥275 lbf	n/a
Chemical Resistance	ASTM C650	n/a
Freeze Thaw	ASTM C1026	n/a

### APPLICATION

Backsplash	✓	Indoor Wall	✓
Shower Wall	✓	Indoor Floor	✓
Shower Floor	✓	Pool Decking	✗
Submerged (Tub)	✗	Submerged (Pool)	✗
Outdoor	✓	Residential/Commercial Use:	✓

### NOTES

Product specifications are subject to variation and tolerances within testing or productions and may vary. Variations in appearance, texture, construction, dimensions, performance, and style may occur and should be considered in product selection.





The product specifications listed reflect data from the manufacturer or from laboratory testing performed under specific testing conditions. As such it does not represent all conditions under which the products may be used or subjected.

For information on performance standards and/or suitability please consult the ANSI, ASTM, or Tile Council of North America resources.

\*Natural stone is inherently varied and can display a wide range of visual differences from V1-Uniform Appearance to V4-Substantial Variation. This means that tiles from the same series or color name can differ significantly in tone, veining, movement, and texture. Such variation is a hallmark of genuine stone and contributes to its unique beauty, but it also requires careful planning.




### SIZES

	Nominal Size	Actual Size	Thickness	Color	Finish	Faces	Sq. Ft. / Carton	Pcs / Carton
	12"x14" Hex Mosaic	12"x13.90" 4" Chip	9.5mm	Calacatta	Satin	n/a	5.80 sqft	5
	10"x11" Herringbone Mosaic	9.60"x11" 1"x4" Chip	9.5mm	Calacatta	Satin	n/a	3.65 sqft	5
	12"x11" Picket Mosaic	12"x10.50" 2"x6" Chip	9.5mm	Calacatta	Satin	n/a	4.40 sqft	5
	12"x12" Basketweave Mosaic	12"x12" 3.38"x2.44" Chip	9.5mm	Calacatta	Satin	n/a	5 sqft	5

### PRODUCT INFORMATION

Material	Marble
Body Color	n/a
Edge	Waterjet Cut
Manufacturing Process	Honed
Country of Origin	Malaysia

### INSTALLATION

Suggested Grout Line Size	1/16", 1/8", 3/16"	
Installation Options	Floor/Wall	
Shade Variation	V3* Moderate Variation	



### PERFORMANCE PROPERTIES

Test	Test Standard	Result
Dynamic Coefficient of Friction	ANSI A137.1-2012 AcuTest™ ANSI/NFSI B101.3-2012	<0.42
Water Absorption	ASTM C373-16 ISO 10545-3	<0.50%
PEI Rating	ASTM C1027-09 or ISO 10545-7 (Glazed); ASTM C1243-93 (2015) or ISO 10545-6 (Unglazed)	n/a
Mohs Scratch Hardness	1:Talc 2:Gypsum 3:Calcite 4:Fluorite 5:Apatite 6:Feldspar 7:Quartz 8:Topaz 9:Corundum 10:Diamond	3
Breaking Strength	ASTM C648-04 (2014): ≥275 lbf	n/a
Chemical Resistance	ASTM C650	n/a
Freeze Thaw	ASTM C1026	n/a

### APPLICATION

Backsplash	✓	Indoor Wall	✓
Shower Wall	✓	Indoor Floor	✓
Shower Floor	✓	Pool Decking	✗
Submerged (Tub)	✗	Submerged (Pool)	✗
Outdoor	✓	Residential/Commercial Use:	✓

### NOTES

Product specifications are subject to variation and tolerances within testing or productions and may vary. Variations in appearance, texture, construction, dimensions, performance, and style may occur and should be considered in product selection.





The product specifications listed reflect data from the manufacturer or from laboratory testing performed under specific testing conditions. As such it does not represent all conditions under which the products may be used or subjected.

For information on performance standards and/or suitability please consult the ANSI, ASTM, or Tile Council of North America resources.

\*Natural stone is inherently varied and can display a wide range of visual differences from V1-Uniform Appearance to V4-Substantial Variation. This means that tiles from the same series or color name can differ significantly in tone, veining, movement, and texture. Such variation is a hallmark of genuine stone and contributes to its unique beauty, but it also requires careful planning.



## SIZES

	Nominal Size	Actual Size	Thickness	Color	Finish	Faces	Sq. Ft. / Carton	Pcs / Carton
	11"x12" Hex Mosaic	10.70"x12" 4" Chip	10mm	Iceberg	Satin	n/a	4.435 sqft	5
	9"x11" Herringbone Mosaic	9"x11" 1"x4" Chip	10mm	Iceberg	Satin	n/a	3.755 sqft	5
	10"x12" Picket Mosaic	10.04"x12" 2"x6" Chip	10mm	Iceberg	Satin	n/a	4.075 sqft	5
	12"x12" Basketweave Mosaic	12"x12" 3.38"x2.44" Chip	10mm	Iceberg	Satin	n/a	4.99 sqft	5

## PRODUCT INFORMATION

Material	Marble
Body Color	n/a
Edge	Waterjet Cut
Manufacturing Process	Honed
Country of Origin	Turkey

## INSTALLATION

Suggested Grout Line Size 1/16", 1/8", 3/16"

Installation Options	Floor/Wall
Shade Variation	V2* Slight Variation



## PERFORMANCE PROPERTIES

Test	Test Standard	Result
Dynamic Coefficient of Friction	ANSI A137.1-2012 AcuTest™ ANSI/NFSI B101.3-2012	<0.42
Water Absorption	ASTM C373-16 ISO 10545-3	<0.50%
PEI Rating	ASTM C1027-09 or ISO 10545-7 (Glazed); ASTM C1243-93 (2015) or ISO 10545-6 (Unglazed)	n/a
Mohs Scratch Hardness	1:Talc 2:Gypsum 3:Calcite 4:Fluorite 5:Apatite 6:Feldspar 7:Quartz 8:Topaz 9:Corundum 10:Diamond	3
Breaking Strength	ASTM C648-04 (2014): ≥275 lbf	n/a
Chemical Resistance	ASTM C650	n/a
Freeze Thaw	ASTM C1026	n/a

## APPLICATION

Backsplash	✓	Indoor Wall	✓
Shower Wall	✓	Indoor Floor	✓
Shower Floor	✓	Pool Decking	✗
Submerged (Tub)	✗	Submerged (Pool)	✗
Outdoor	✓	Residential/Commercial Use:	✓

## NOTES

Product specifications are subject to variation and tolerances within testing or productions and may vary. Variations in appearance, texture, construction, dimensions, performance, and style may occur and should be considered in product selection.





The product specifications listed reflect data from the manufacturer or from laboratory testing performed under specific testing conditions. As such it does not represent all conditions under which the products may be used or subjected.

For information on performance standards and/or suitability please consult the ANSI, ASTM, or Tile Council of North America resources.

\*Natural stone is inherently varied and can display a wide range of visual differences from V1-Uniform Appearance to V4-Substantial Variation. This means that tiles from the same series or color name can differ significantly in tone, veining, movement, and texture. Such variation is a hallmark of genuine stone and contributes to its unique beauty, but it also requires careful planning.



### SIZES

	Nominal Size	Actual Size	Thickness	Color	Finish	Faces	Sq. Ft. / Carton	Pcs / Carton
	12"x14" Hex Mosaic	12"x13.90" 4" Chip	9.5mm	Thassos	Satin	n/a	5.80 sqft	5
	10"x11" Herringbone Mosaic	9.60"x11" 1"x4" Chip	9.5mm	Thassos	Satin	n/a	3.65 sqft	5
	12"x11" Picket Mosaic	12"x10.50" 2"x6" Chip	9.5mm	Thassos	Satin	n/a	4.40 sqft	5
	12"x12" Basketweave Mosaic	12"x12" 3.38"x2.44" Chip	9.5mm	Thassos	Satin	n/a	5 sqft	5

### PRODUCT INFORMATION

Material	Marble
Body Color	n/a
Edge	Waterjet Cut
Manufacturing Process	Honed
Country of Origin	Malaysia

### INSTALLATION

Suggested Grout Line Size 1/16", 1/8", 3/16"

Installation Options	Floor/Wall
Shade Variation	V1* Uniform Appearance



### PERFORMANCE PROPERTIES

Test	Test Standard	Result
Dynamic Coefficient of Friction	ANSI A137.1-2012 AcuTest™ ANSI/NFSI B101.3-2012	<0.42
Water Absorption	ASTM C373-16 ISO 10545-3	<0.50%
PEI Rating	ASTM C1027-09 or ISO 10545-7 (Glazed); ASTM C1243-93 (2015) or ISO 10545-6 (Unglazed)	n/a
Mohs Scratch Hardness	1:Talc 2:Gypsum 3:Calcite 4:Fluorite 5:Apatite 6:Feldspar 7:Quartz 8:Topaz 9:Corundum 10:Diamond	3
Breaking Strength	ASTM C648-04 (2014): ≥275 lbf	n/a
Chemical Resistance	ASTM C650	n/a
Freeze Thaw	ASTM C1026	n/a

### APPLICATION

Backsplash	✓	Indoor Wall	✓
Shower Wall	✓	Indoor Floor	✓
Shower Floor	✓	Pool Decking	✗
Submerged (Tub)	✗	Submerged (Pool)	✗
Outdoor	✓	Residential/Commercial Use:	✓

### NOTES

Product specifications are subject to variation and tolerances within testing or productions and may vary. Variations in appearance, texture, construction, dimensions, performance, and style may occur and should be considered in product selection.

The product specifications listed reflect data from the manufacturer or from laboratory testing performed under specific testing conditions. As such it does not represent all conditions under which the products may be used or subjected.

For information on performance standards and/or suitability please consult the ANSI, ASTM, or Tile Council of North America resources.

\*Natural stone is inherently varied and can display a wide range of visual differences from V1-Uniform Appearance to V4-Substantial Variation. This means that tiles from the same series or color name can differ significantly in tone, veining, movement, and texture. Such variation is a hallmark of genuine stone and contributes to its unique beauty, but it also requires careful planning.

